
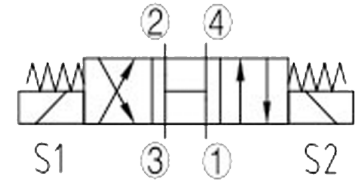



# SV - 08 - 34H

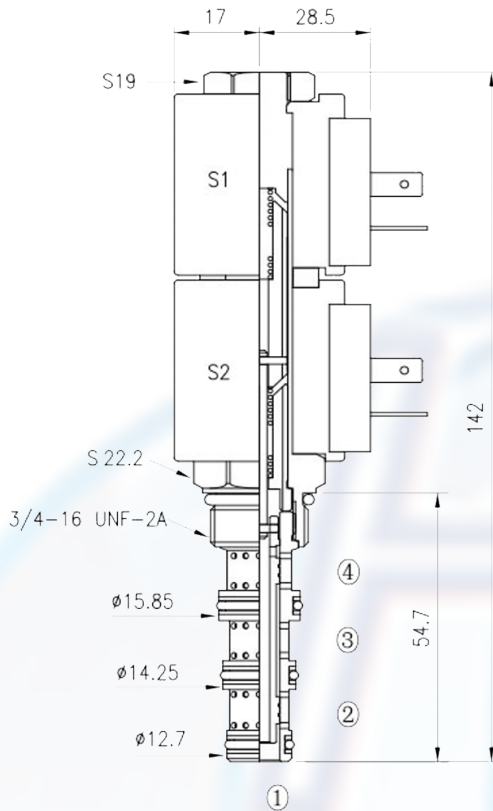

## SPECIFICATION:

- Max working pressure: 210bar
  - Flow max: see performant chart
  - Internal leakage: <82cc/min / 210bar
  - Filtration of oil: 25m or better
  - Temperature: -30 ~ +110°C
  - Cavity: 08 - 4
  - Installatin torque: 25 ~ 28Nm
  - Coil rating: 85% ~110%
- Continuous from 85% to 110% of rated voltage

## PERFORMANCE 32 cST Oil/45°C

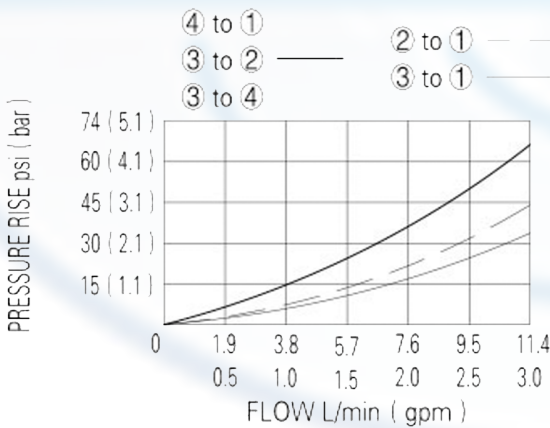

When de-energized, the valve allows flow at all ports.

when the upper solenoid is energized, the valve allows flow between the 2 and 1 ports and the 3 and 4 ports.

when the lower solenoid is energized, the valve allows flow between the 4 and 1 ports and the 3 and 2 ports.

to order:

SV - 08 - 34H -  -

coil connection:  
D = Double Lead  
H = Hirschmann

voltage:

- 12 = 12V DC
- 24 = 24V DC
- 110 = 110V AC
- 220 = 220V AC