



# SV2 - 10 - 4LC

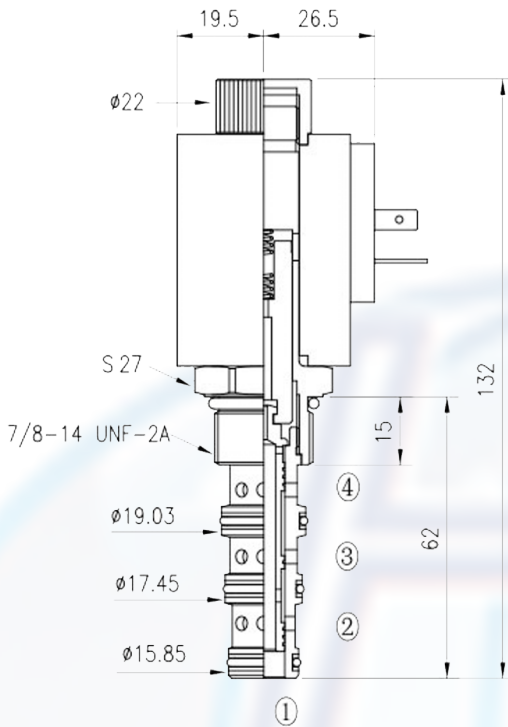


**SPECIFICATION:**

- Max working pressure: 210bar
- Flow max: see performant chart
- Internal leakage: <82cc/min / 210bar
- Filtration of oil: 25m or better
- Temperature: -30 ~ +110°c
- Cavity: 10 - 4
- Installatin torque: 34 ~ 37Nm
- Coil rating: 85% ~110%

Continuous from 85% to 110% of rated voltage

**PERFORMANCE**

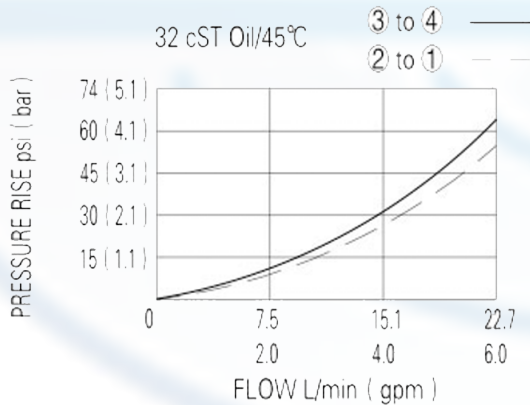

When de-energized, the valve allows flow from 2 to 1 and from 3 to 4; when energized, the cartridge's spool shifts and allows flow from 3 to 1, and is blocked at 2 and 4.

to order:

SV2 - 10 - 4LC -  -

cavity \_\_\_\_\_

function \_\_\_\_\_

voltage:  
 12 = 12V DC  
 24 = 24V DC  
 110 = 110V AC  
 220 = 220V AC

coil connection:  
 D = Double Lead  
 H = Hirschmann