



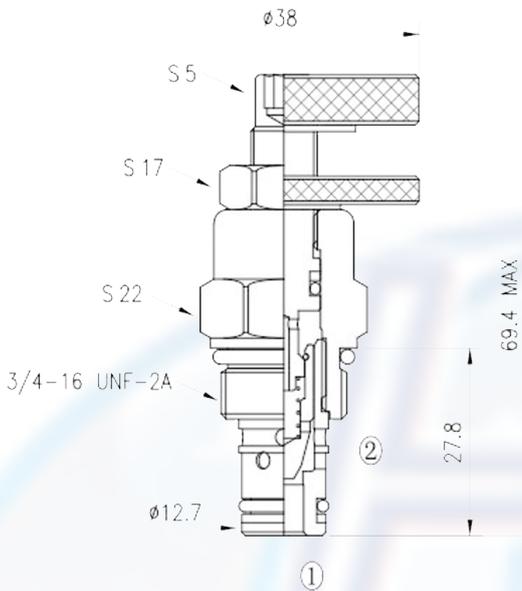


FC - 08



SPECIFICATION:

- Max working pressure: 240bar
- Flow max: see performant chart
- Internal leakage: 5 drops/min
- Filtration of oil: 25m or better
- Temperature: -30 ~ +110°C
- Cavity: 08 - 2
- Installatin torque: 25 ~ 28Nm

PERFORMANCE

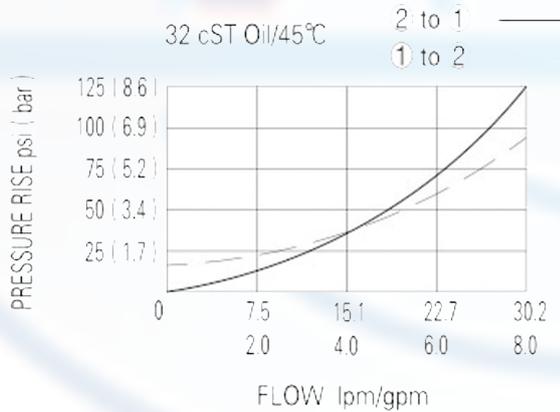


The valve varies flow restriction by adjusting needle in or out. flow is metered from 2 to 1. free reverse flow is from 1 to 2

to order:

Adjustable restriction valves with reverse flow check

Cavity

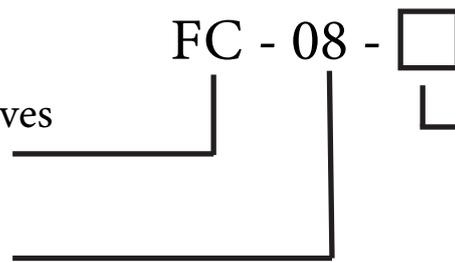

M = hand wheel.
(Omit for standard).