
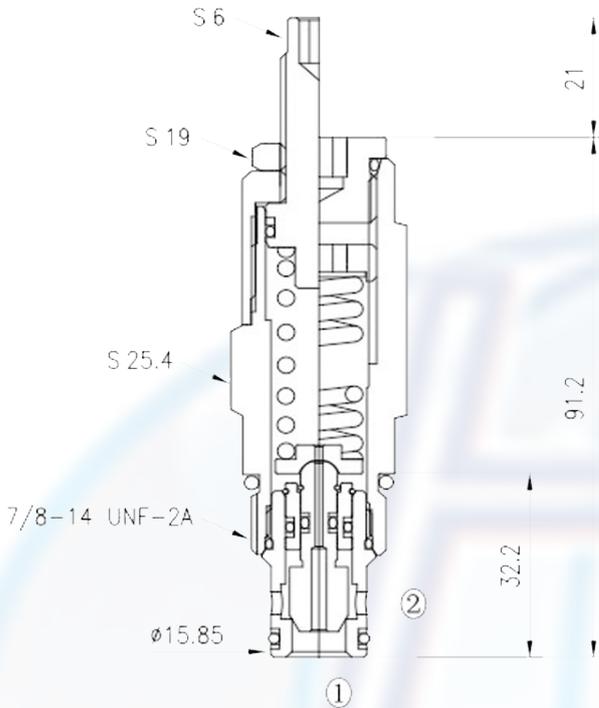


BRV - 10




SPECIFICATION:

- Max working pressure: 207bar
- Flow max: see performant chart
- Internal leakage: <3cc/min/207bar
- Filtration of oil: 25m or better
- Temperature: -30 ~ +110°C
- Cavity: 10 - 2
- Installatin torque: 34 ~ 37Nm

PERFORMANCE

32 cST Oil/45°C

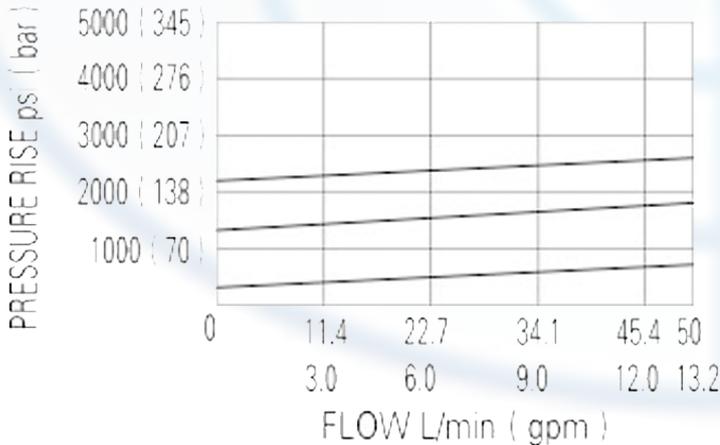

The valve is a direct-acting, dual cross-over relife valve in a single cartridge format. when pressure at either port exceeds the nominal setting value, flow will be transmitted to the opposite port. Back pressure at either port will affect the nominal setting of the opposite port on a 1:1 basis.

to order:

BRV - 10 - -

Bi - directional relief valves

Cavity

PRESS RANGE:

- 06 = 20 ~ 65bar, preset : 45bar
- 12 = 50 ~ 125bar, preset : 100bar
- 20 = 70 ~ 207bar, preset : 160bar

Control:

L = screw adjustment