



MV - 08

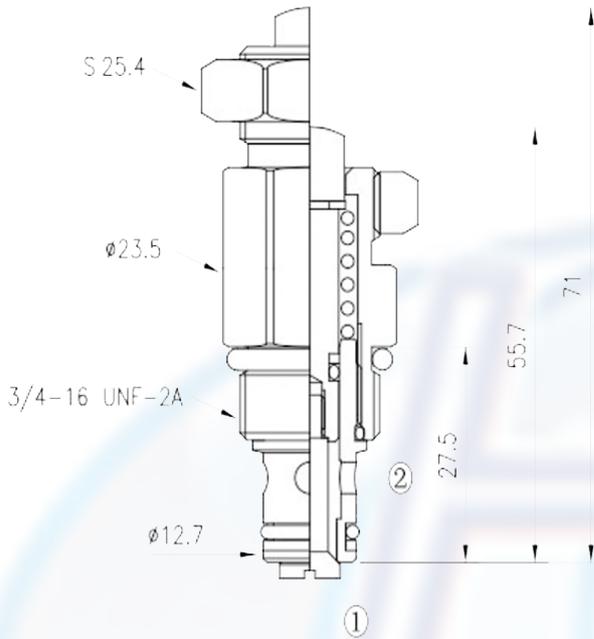


SPECIFICATION:

Max working pressure:	250bar
Flow max:	see performant chart
Internal leakage:	3 drops/min/207bar
Filtration of oil:	25m or better
Temperature:	-30 ~ +110°C
Cavity:	08 - 2
Installatin torque:	25 ~ 28Nm

PERFORMANCE

32 cST Oil/45°C

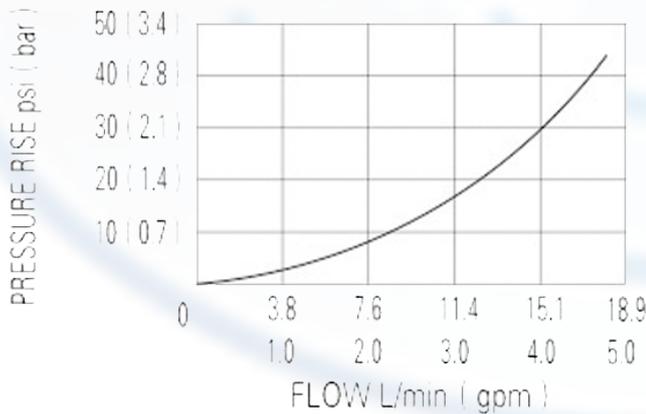

The valve blocks flow in both direc-
tion.

When the plunger is actuated, the
poppet opens, allowing flow in
either direction.

to order:

MV - 08 -

Mobile operated directional valves

Cavity

EXTERNAL LENGTH:
A = 55.7mm
Omit for standard = 71mm