



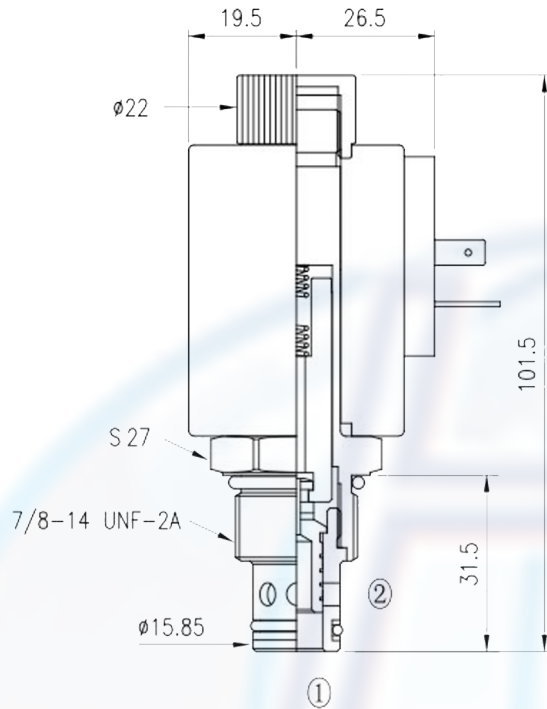

SV2 - 10 - 2NCS




SPECIFICATION:

- Max working pressure: 210bar
 - Flow max: see performant chart
 - Internal leakage: <82cc/min / 210bar
 - Filtration of oil: 25m or better
 - Temperature: -30 ~ +100°C
 - Cavity: 10 - 2
 - Installatin: 34 ~ 37Nm
 - Coil rating: 85% ~110%
- Continuous from 85% to 110% of rated voltage

PERFORMANCE

32 cST Oil/45°C

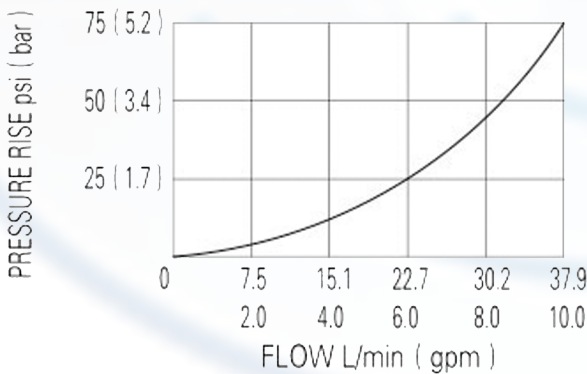

When de-energized, the valve blocks flow in both directionals, when energized, allowing flow from 2 to 1 and 1 to 2.

to order:

SV2 - 10 - 2NCS

cavity

function



coil connection:

- D = Double Lead
- H = Hirschmann

voltage:

- 12 = 12V DC
- 24 = 24V DC
- 110 = 110V AC
- 220 = 220V AC